

LEGEND


PAVEMENT/WALK REPLACEMENT

STRUCTURE SCHEDULE

- MH ST-1
TC=845.75
EX. 15" NE INV.=839.08
PR. 15" SW INV.=839.08
- MH ST-2
TC=847.8
PR. 15" NE INV.=839.38
PR. 15" S INV.=839.38
- MH ST-3
TC=847.25
PR. 15" N INV.=839.80
EX. 15" SW INV.=839.80
- MH SA-1
TC=±840.0 (MATCH EXISTING GRADE)
PR. 6" E INV.=835.5
PR. 6" W INV.=835.4

NOTES

- 1) CONTRACTOR IS TO COORDINATE REQUIRED UTILITY SERVICE ENTRY POINTS WITH THE SELECTED STRUCTURE. ADJUSTMENTS TO THE ENTRY LOCATIONS MAY BE NECESSARY AND SHALL BE REVIEWED WITH THE ARCHITECT PRIOR TO COMMENCING INSTALLATION.
- 2) CONTRACTOR IS TO LOCATE EXISTING UTILITIES THROUGH EMPLOYMENT OF A PRIVATE UTILITY LOCATOR PRIOR TO COMMENCING CONSTRUCTION.

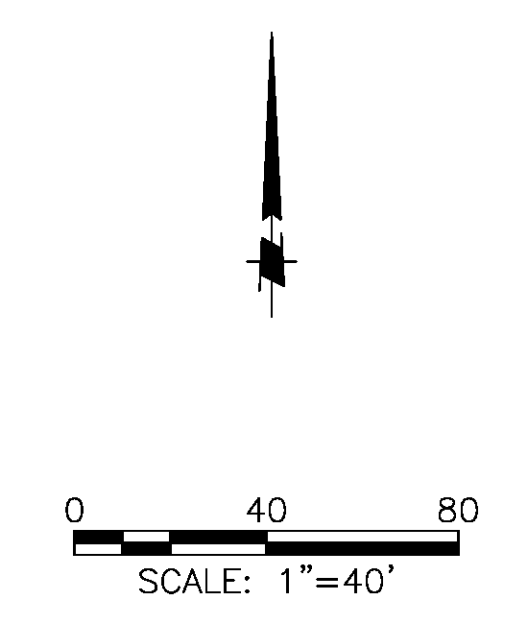

#	Date	Change Description
3	3/30/11	ADDENDUM 3

Reynoldsburg Baldwin Rd. Jr. High Concessions Bldg.
2300 Baldwin Road
Reynoldsburg, Ohio 43068
for
Reynoldsburg City Schools

MOODY·NOLAN, INC.
architecture civil engineering interior architecture

300 Spruce Street Phone: (614) 461-4664
Suite 300 Columbus, Ohio 43215 Fax: (614) 290-8881
www.moodynolan.com

Dwg. Coord.:	Tech. Coord.:	MIN # 08177.1
SITE PLAN		C1.10
BID DOCUMENTS		March 17, 2011